
# DT433 2-Wire Indoor Monitor

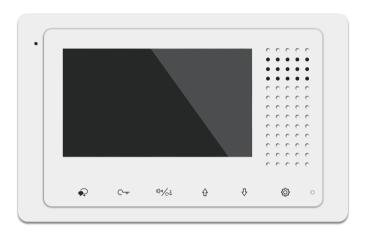

#### **DESCRIPTION**


2-wire system 4.3 inch digital color TFT monitor with touch button.


# 

#### **FEATURES**

- ▶ 4.3 inch TFT screen;
- ► Touch button design with visual sweep;
- ► Economic project monitor;
- ► Ultra thin design(17mm);
- No screw assembling & no bracket;
- ▶ Public memory & call transfer;
- Actuator via DT-RLC;
- CCTV camera monitoring;
- Call guard unit.

#### 1. Parts and Functions

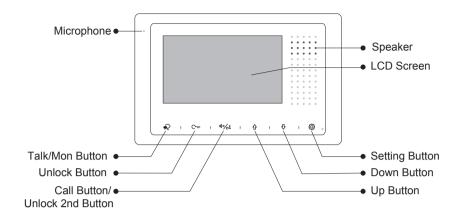




#### **Key functions**

Microphone	Receive voice from the user.	
Speaker	Send out vioce from the visitor.	
LCD screen	Display the visitors' image.	
Setting button	Press to select the setting item you want.	
Down button	Press to decrease the value.	
Up button	Press to increase the value.	
Talk/Mon button	Press to communicate hands free with visitor;	
	Press to view the outdoor condition in standby mode.	
Unlock button	Press to release the door	
Call button/Unlock 2nd button	In standby mode, pick up handset, then press Call button to activate the inner call;	
	During calling/talking state, press Unlock 2nd button to release the second door.	
DIP	Set the monitor's address.	
Bus line	Connect power supply.	

#### 2. Mounting

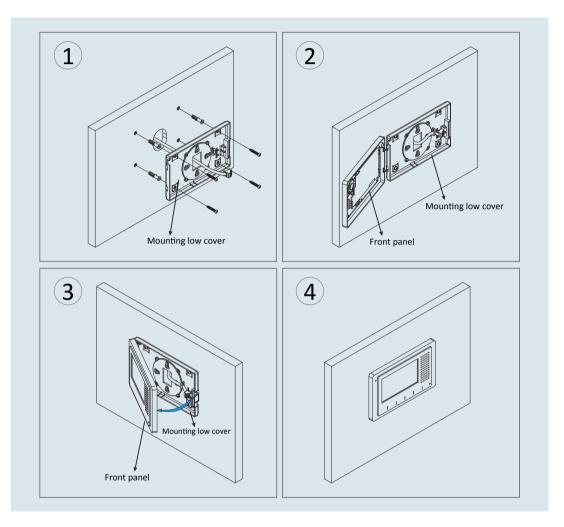

#### 3. Specification

• Power supply: DC 20~28V

Power consumption: Standby 7mA; Working 145mA

Monitor screen: 4.3 Inch digital color LCD

Display Resolutions: 800\*3(R, G, B) x 480 pixels

Video signal: 1Vp-p,  $75\Omega$ , CCIR standard

Wiring: 2 wires, non-polarity

Dimension:  $105(H)\times167(W)\times17(D)$ mm

#### 4. Ordering Information

Model No.	Brief Description	Menu style
DT433/D4	4.3 inch digital color TFT monitor with touch button & white housing	Color icon

### 5. Packing Information



## 6. User Interface: Menu style

